

ISSUE 3; August 2021

Description

- Ceramic package with a hermetically seam sealed metal lid suitable for automotive applications. Qualified to AEC-Q200 and with IATF-16949:2016 release. Not suitable for safety critical applications.
- -A 2 pad
- -B 4 pad

Frequency Parameters

- Frequency 6.0MHz to 125.0MHz
- Frequency Tolerance $\pm 10.00\text{ppm}$ to $\pm 50.00\text{ppm}$
- Tolerance Condition @ 25°C
- Frequency Stability $\pm 50.00\text{ppm}$ to $\pm 150.00\text{ppm}$
- Ageing $\pm 5\text{ppm}$ max per year @ 25°C

Electrical Parameters

- Load Capacitance (CL) 8.0pF to 75.0pF
- Shunt Capacitance (C0) 7pF max
- Drive Level 50 μ W typical

Operating Temperature Ranges

- -40 to 85°C
- -40 to 125°C

Environmental Parameters

- Storage Temperature Range: -45°C to Max Operating Temperature+5°C
- Qualified to AEC-Q200

Manufacturing Details

- Maximum Process Temperature: 260°C (10secs max)
- RoHS Terminations NiAu
- RoHS Reflow 260°C max for 10secs max

Ordering Information


- Frequency*
- Model*
- Variant*
- Frequency Tolerance (@ 25°C)*
- Frequency Stability (over operating temperature range)*
- Operating Temperature Range*
- Load Capacitance*
- Overtone
- (*minimum required)
- Example
10.0MHz 12SMX AUTO - B
50/100/-40 to 125C/8 FUND

Compliance


- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable



Outline (mm) -A = 2 pad

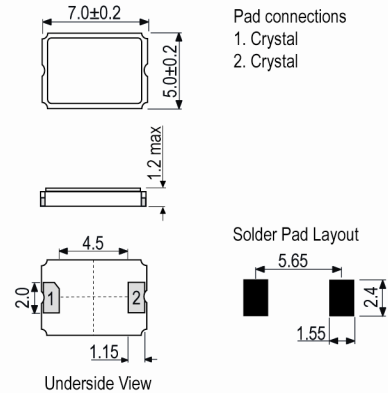

Outline (mm) -B = 4 pad

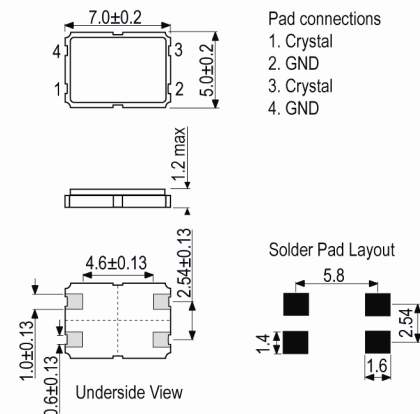

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

Packaging Details

- Pack Style: Cutt On tape cut from a reel
Pack Size: 100
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000

Electrical Specification - maximum limiting values

| Frequency Min | Frequency Max | Temperature Range | Stability (Min) | Over Tone Order | ESR |
|---------------|---------------|-------------------------|-----------------|-----------------|------------|
| | | °C | ppm | | Ω |
| 6.0MHz | 8.0MHz | -40 to 85 -40 to 125 | ±50 ±100 | Fundamental | 150 150 |
| 8.000001MHz | 9.0MHz | -40 to 85 -40 to 125 | ±50 ±100 | Fundamental | 100 100 |
| 9.000001MHz | 10.0MHz | -40 to 85 -40 to 125 | ±50 ±100 | Fundamental | 60 60 |
| 10.000001MHz | 11.0MHz | -40 to 85 -40 to 125 | ±50 ±100 | Fundamental | 50 50 |
| 11.000001MHz | 13.0MHz | -40 to 85 -40 to 125 | ±50 ±100 | Fundamental | 40 40 |
| 13.000001MHz | 50.0MHz | -40 to 85 -40 to 125 | ±50 ±100 | Fundamental | 30 30 |
| 26.0MHz | 125.0MHz | -40 to 85 -40 to 125 | ±50 ±100 | 3rd Overtone | 100 100 |

*Stability Maximum values ±150ppm

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com