

ISSUE 7; March 2017

Description

- Standard 7 x 5mm Voltage Controlled Crystal Oscillators
Pulling of $\pm 100\text{ppm}$ min APR
Available in 5.0V supply
Ceramic package with a seam sealed metal lid, hermetically sealed

Frequency Parameters

- Frequency 1.5MHz to 51.84MHz
- Frequency Stability $\pm 100.00\text{ppm}$

Electrical Parameters

- Supply Voltage 5.0V $\pm 0.25\text{V}$

Frequency Adjustment

- Pulling $\pm 100\text{ppm}$ min APR
- Control Voltage 2.5V $\pm 2.0\text{V}$
- Input Impedance 50k Ω min
- Modulation Bandwidth: $>10\text{kHz}$ (@-3dB, $V_c=2.5\text{V}$)
- Linearity: Positive $< \pm 10\%$

Operating Temperature Ranges

- 0 to 70°C

Output Details

- Output Compatibility HCMOS
- Drive Capability 15pF max
- Logic '1' ($>2.5\text{V}$) to pad 2 enables oscillator output
Logic '0' ($<0.5\text{V}$) to pad 2 disables oscillator output; when disabled the oscillator output goes to the high impedance state
No connection pad 2 enables oscillator output

Noise Parameters

- Phase Jitter: 20ps max @ 1sigma

Environmental Parameters

- Operable Temperature Range: -40 to 85°C
- Shock: MIL-STD-202, Method 213, Cond. E
- Vibration: MIL-STD-883, Method 2007, Cond. A
- Storage Temperature Range: -55 to 125°C

Ordering Information



- Frequency*
- Model*
- Output
- Frequency Stability (over operating temperature range)
- Operating Temperature Range
- Supply Voltage
- Pullability
- Example
20.0MHz CFPV-46
HCMOS $\pm 100\text{ppm}$ 0 to 70C 5.0V $\pm 100\text{ppm}$ min

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable




Outline (mm)



Underside View

- Pad Connections
- Voltage Control
 - Tri-State Operation
 - Ground
 - Output
 - N/C
 - +Vs

Solder Pad Layout



Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: 0800 1808 443

France: 0800 901 383

USA: +1.760.318.2824


Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com


Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000
- Pack Style: Bulk Loose in bulk pack
Pack Size: 100
- Pack Style: Cutt In tape, cut from a reel
Pack Size: 100

Test Circuit

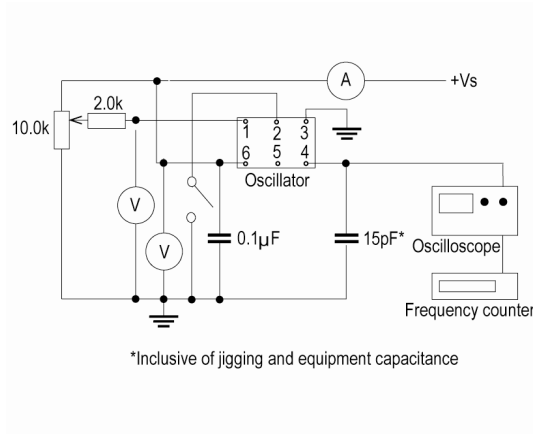

Wave Form

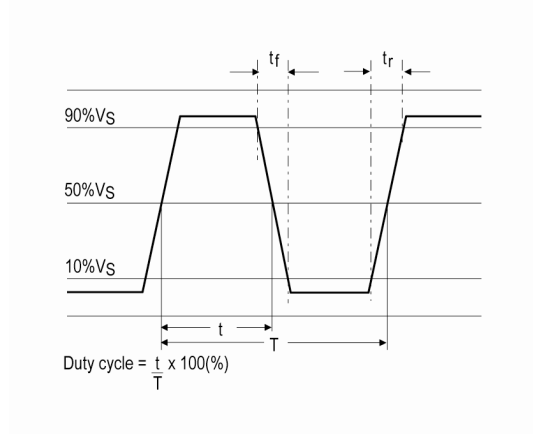

Electrical Specification - maximum limiting values 5.0V ±0.25V

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.5MHz	51.84MHz	0 to 70	±100.0	60	10	40/60%

*This document was correct at the time of printing; please contact your local sales office for the latest version.
[Click to view latest version on our website.](#)*

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com