

ISSUE 1; June 2019

Description

- This product is designed and manufactured by Statek Corporation in California, USA and distributed by IQD. An increasing number of applications require the use of high-temperature crystals. For these applications, we offer CX4VHT crystals. These crystals are designed to operate at temperatures up to and including 200°C, and feature an expected life in excess of 1,000 hours at these temperatures. The frequency range offered is 30kHz to 250kHz
- -SM1 SM1 (gold plated, RoHS compliant)
- -SM5 SM5 (Solder dipped, RoHS compliant)
- Please note that all data is only valid at 25°C unless otherwise stated.

Frequency Parameters

- Frequency 30.0kHz to 250.0kHz
- Frequency Tolerance ±30.00ppm to ±5,000.00ppm
- Tolerance Condition @ 25°C
- Ageing ±5ppm max in first year @ 25°C

Electrical Parameters

- Load Capacitance (CL) 9.0pF
- Shunt Capacitance (C0) 1.1pF typ
- Drive Level 0.5µW Max
- Typical Motional Values @ 32.768kHz:
R1 70kΩ
C1 2.3fF
Q 31k
Co 1.1pF
Turnover Temperature 23°C
R1 @ 150°C 100kΩ
R1 @ 200°C 125kΩ
Drive Level 0.5µW max
- Actual Frequency Shift (@ 32.768kHz):
1008 Hours 1824 Hours
150°C 1.97ppm 2.51ppm
175°C 4.80ppm 5.66ppm
200°C 29.40ppm 36.82ppm
- Projected Frequency Shift (@ 32.768kHz using curve fitting):
4320 Hours 8760 Hours
150°C 3.30ppm 3.94ppm
175°C 6.94ppm 7.99ppm
200°C 47.61ppm 56.46ppm

Frequency Adjustment

- Temperature Coefficient: -0.035ppm/°C²

Operating Temperature Ranges


- 0 to 200°C

Environmental Parameters




- Vibration: 20G rms, 10-2000Hz
- Shock: 5000G 0.3ms, 1/2 sine
- Storage temperature range -55 to 125°C

Manufacturing Details

- Maximum process temperature: 260°C for 20s

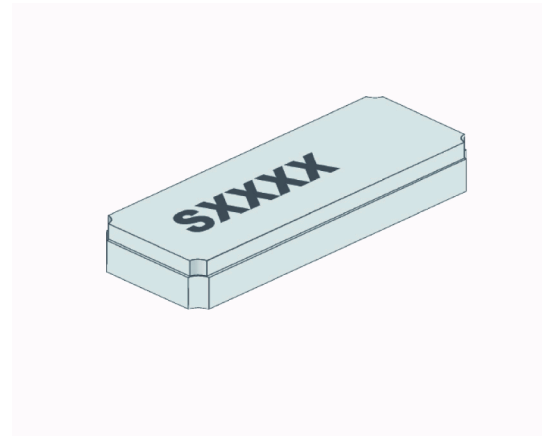

Outline (mm) -SM1 = SM1 (gold plated, RoHS compliant)



Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

Ordering Information

- Termination Variants:
SM1 = Gold Plated (RoHS)
SM5 = Solder Dipped (RoHS)
- Example:
32.768kHz CX4VHT TF-SM1
±100ppm 0+200C FUND
- Minimum Required*:
Frequency*
Model*
Termination Variant*
Frequency Tolerance (@25°C)*
Operating Temperature Range*
Load Capacitance

Compliance

- RoHS Status (2015/863/EU) Optional
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000
- Pack Style: Tray Supplied on a tray
Pack Size: 1

Electrical Specification - maximum limiting values

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Over Tone Order	ESR
		°C	ppm		Ω
30.00kHz	250.00kHz	0 to 200		Fundamental	- 0

*Stability Maximum values ±0ppm

*This document was correct at the time of printing; please contact your local sales office for the latest version.
[Click to view latest version on our website.](#)*

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com