


ISSUE 1; June 2019

Description


- This product is designed and manufactured by Statek Corporation in California, USA and distributed by IQD. An increasing number of applications require the use of high-temperature crystals. For these applications, Statek offers the CX9VHT crystals. These crystals are designed to operate at temperatures up to and including 200°C, and feature an expected life in excess of 1,000 hours at these temperatures. The frequency range offered is 32kHz to 160kHz for CX9VHT crystals.
- -SM1 SM1 (Gold Plated, Glass Lid, RoHS)
- -SM1-C SM1-C (Gold Plated, Ceramic Lid, RoHS)
- -SM5-C SM5-C (Solder Dipped, Ceramic Lid, RoHS)
- Please note that all data is only valid at 25°C unless otherwise stated.

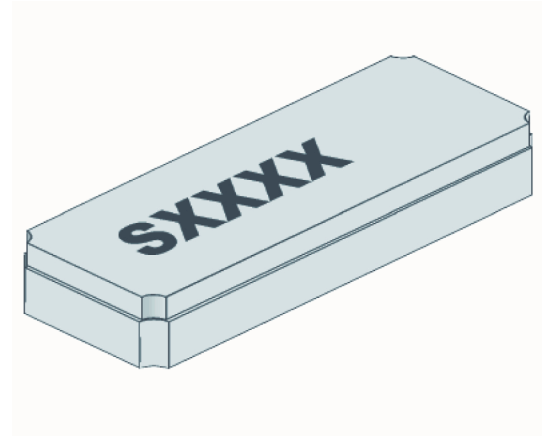

Frequency Parameters

- Frequency 32.0kHz to 160.0kHz
- Frequency Tolerance ±100.00ppm
- Tolerance Condition @ 25°C
- Ageing ±5ppm max in 1st year @ 25°C
- Frequency Stability Over Temperature = $(f(T)-F(T_0))/F(T_0) = k(T-T_0)^2$
 $f(T)$ = Frequency at temperature T
 T = Temperature
 T₀ = Turnover temperature
 F₀ = Frequency at turnover temperature T₀

Outline (mm) -SM1 = SM1 (Gold Plated, Glass Lid, RoHS)

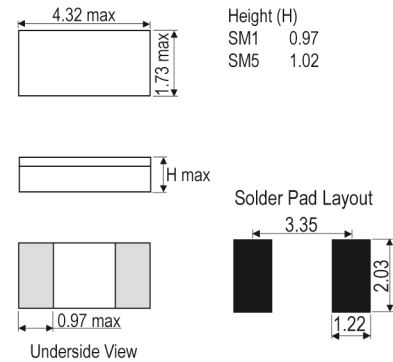

Electrical Parameters

- Load Capacitance (CL) 9.0pF
- Shunt Capacitance (C0) 1pF typical
- Drive Level 0.5µW max
- Typical figures @ 32.768kHz
 Motional Resistance: 100kΩ @ 25°C, 125kΩ @ 150°C, 160kΩ @ 200°C,
 Motional Capacitance: 2.2fF
 Quality Factor Q 22k
 Turnover Temperature: 22°C

Frequency Adjustment

- Temperature Coefficient (k) -0.035 ppm/°C²

Operating Temperature Ranges

- 0 to 150°C
- 0 to 175°C
- 0 to 200°C

Environmental Parameters

- Shock: 5000G, 0.3 ms, 1/2 sine
- Vibration: 20G rms, 10-2000 Hz random
- Storage Temperature Range: -55 to 125°C

Manufacturing Details

- Max Process Temperature 260°C for 20 sec

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

Ordering Information

- Minimum Required*
Frequency*
Model*
Termination Variant*
Frequency Tolerance (@25°C)*
Operating Temperature Range*
Load Capacitance
- Example:
100.0kHz CX9VHT TF-SM1
±100ppm 0+200C FUND

Compliance

- RoHS Status (2015/863/EU) Optional
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000
- Pack Style: Tray Tray pack
Pack Size: 1

Electrical Specification - maximum limiting values

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Over Tone Order	ESR
		°C	ppm		Ω
32.000kHz	160.00kHz	0 to 200		Fundamental	- 0

*Stability Maximum values ±0ppm

This document was correct at the time of printing; please contact your local sales office for the latest version.
[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com