




Outline (mm)

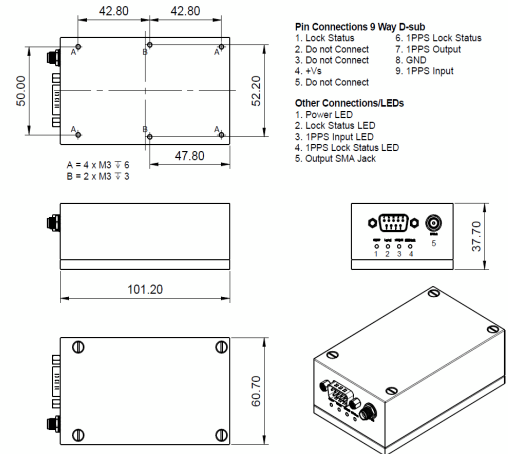

Description

- The IQRB-3 rubidium atomic clock oscillator provides a low noise, tight stability frequency reference. The IQRB-3 can be synchronised to a 1PPS signal as well as used as a 1PPS output source.
- Features:
 - 1PPS Output
 - Holdover 1 μ s/24h
 - Phase noise -110dBc/Hz at 1Hz
 - Short term stability 8E-12 at 100s
 - 0.05ppb tolerance
- Applications:
 - With high stability, low phase noise and 1PPS interface ideal as stand-alone frequency and timing reference for communication, broadcasting, financial and industrial applications.

Frequency Parameters

- Frequency 10.0MHz
- Frequency Tolerance (typ) ± 0.05 ppb
- Tolerance Condition @ 25°C
- Frequency Stability ± 0.30 ppb
- Ageing (after 30days):
 - ± 0.005 ppb max/day
 - ± 0.05 ppb max/month
 - ± 0.5 ppb max/year
- Retrace (after 1 hour of continuous operation): ± 0.03 ppb
- Note: Operating temperature range of -40 to 60°C is available upon request, please contact an IQD Sales Office.

Electrical Parameters

- Supply Voltage 12.0V +3.0V
- Note: The device will operate over the Supply Voltage Range 12.0V to 15.0V.
- Power Consumption: 30W max at warm-up @ 25°C, 6W @ steady-state
- Warm Up Time: 5 mins typ to lock @ 25°C
- 10MHz Lock Status (Pin 1): High (3.3V) when out of lock and low (0V) when locked
- 1PPS Lock Status (Pin 6): High (1.7V) when out of lock. Low (0V) when synchronised to external 1PPS

Operating Temperature Ranges

- -20 to 60°C

Sales Office Contact Details:

UK: +44 (0)1460 270200
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Output Details

- Output Compatibility Sine
- Drive Capability 50Ω
- Output Level (@ 50Ω): +8dBm ±2dBm
- Output Connector Type: SMA
- Note: CMOS output available on request

Noise Parameters

- Short Term Stability (ADEV) typical:
 - 1s 5.0E-11
 - 10s 6.0E-12
 - 100s 8.0E-12
- Phase Noise (typ):
 - 110dBc/Hz @ 1Hz
 - 135dBc/Hz @ 10Hz
 - 145dBc/Hz @ 100Hz
 - 155dBc/Hz @ 1kHz
 - 158dBc/Hz @ 10kHz
- Harmonics: -25dBc max

Environmental Parameters

- Storage Temperature Range: -40 to 90°C
- Mechanical Shock: IEC 60068-2-27, Test Ea: Acceleration of 50g peak amplitude for 11ms duration
- Vibration: IEC 60068-2-06, Test Fc: 10Hz-55Hz 1.5mm displacement, 55Hz-500Hz 10g acceleration
- Atmospheric Pressure: 1E-13/mbar
- Magnetic Field Sensitivity: 5E-12/Gauss

Manufacturing Details

- These products need to maintain thermal stability to obtain optimum performance. Mounting the device in direct contact to a chassis may cause detrimental heat sink effect, it is recommend to mount the device with >1mm clearance from the base. Avoid airflow and do not attempt to mount heat sink to the device.

Compliance

- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Bulk Bulk pack
- Pack Size: 1

Sales Office Contact Details:

UK: +44 (0)1460 270200
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Status Indication LEDs

Position	Name	Colour	Description	Status	
1	Power	Green	Indicates that power is on	Solid	
2	Lock Status	Red	Not ready: rubidium oscillator not locked	Solid	
2	Lock Status	Red	Not ready: rubidium locked, PLL fine tuning mode	Flashing	
2	Lock Status	Red	Ready: rubidium locked, PLL locked	Off	
3	1PPS Input	Yellow	Flashes with 1PPS input	Flashing	
4	1PPS Lock Status	Orange	Not locked: external 1PPS not found	Solid	
4	1PPS Lock Status	Orange	Establishing lock: external 1PPS detected, system locking	Flashing	
4	1PPS Lock Status	Orange	Locked to external 1PPS: full lock acquired	Off	

Sales Office Contact Details:

UK: +44 (0)1460 270200
 USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com