

ISSUE 2; January 2024

Description

- 5 x 3.2mm SMD crystal.
Available in a 2 or 4 pad package.
Ceramic package with a seam sealed metal lid, hermetically sealed.
Suitable for Industrial applications qualified to AEC-Q200 Rev D.
Please see our CFPX-104 for standard stock alternative.
- A 2 pad
- 2 Pad version
- B 4 pad
- 4 Pad version

Frequency Parameters

- Frequency: 12.0MHz to 32.0MHz
- Frequency Tolerance: $\pm 10.00\text{ppm}$ to $\pm 50.00\text{ppm}$
- Frequency Stability: $\pm 15.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing: $\pm 5\text{ppm}$ max per year @ 25°C

Electrical Parameters

- Load Capacitance (CL): 8.0pF to 30.0pF
- Shunt Capacitance (C0): 7pF max
- Drive Level: 50µW standard

Operating Temperature Ranges

- 20 to 125°C
- 40 to 85°C

Environmental Parameters


- Storage Temperature Range: -40 to 150°C
- Qualified to AEC-Q200 Rev D

Ordering Information




- Frequency*
- Model*
- Variant*
- Frequency Tolerance (@25°C)*
- Frequency Stability (over operating temperature range)*
- Operating Temperature Range*
- Load Capacitance*
- Overtone
(*minimum required)
- Example
20.0MHz IQXC-31-B
30/50/-40 to 85C/8 FUND

Compliance



- RoHS Status (2015/863/EU): Compliant
- REACH Status: Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

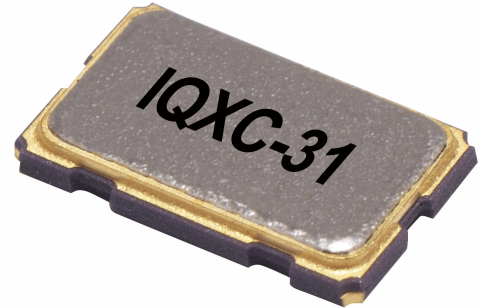


Outline (mm) -A = 2 pad



Outline (mm) -B = 4 pad



- Pad Connections
- Crystal
 - GND & Lid
 - Crystal
 - GND & Lid



Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1 760 318 2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

Packaging Details

- Pack Style: Cutt In tape, cut from a reel
 Pack Size: 100
- Pack Style: Bulk Loose in bulk pack
 Pack Size: 100
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
 Pack Size: 1,000

Electrical Specification - maximum limiting values

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Over Tone Order	ESR
		°C	ppm		Ω
12.0MHz	19.999999MHz	-20 to 125	±50	Fundamental	150
		-40 to 85	±15		150
20.0MHz	32.0MHz	-20 to 125	±50	Fundamental	100
		-40 to 85	±15		100

*Stability Maximum values ±100ppm

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1 760 318 2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com