



## **IQXO-62x**

IQXO-62x


**LVPECL output crystal oscillator using a high frequency fundamental crystal to give very low jitter.  
Hermetically sealed ceramic package with a seam sealed metal lid.**

<b>Model Name</b>	<b>Description</b>
<b>IQXO-623</b>	<b>A 2.5V Version</b>
<b>IQXO-624</b>	<b>A 3.3V Version</b>

ISSUE 3; December 2023

### Description

- LVPECL output crystal oscillator using a high frequency fundamental crystal to give very low jitter. Hermetically sealed ceramic package with a seam sealed metal lid.
- Developed Frequencies: 25.0MHz, 27.0MHz, 100.0MHz, 125.0MHz and 156.250MHz
- Note: Operating temperature ranges -40 to 105°C and -40 to 125°C are intended for industrial use and not for safety critical applications such as automotive. Please contact IQD for alternative options.

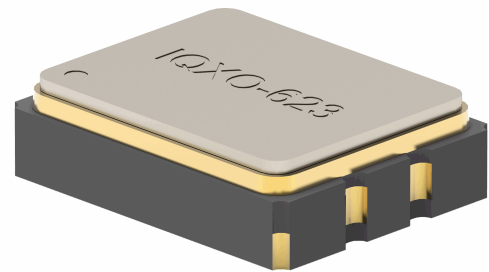

### Frequency Parameters

- Frequency: 13.50MHz to 156.250MHz
- Frequency Stability:  $\pm 25.00\text{ppm}$  to  $\pm 100.00\text{ppm}$
- Ageing:  $\pm 3\text{ppm}$  max per year @ 25°C

### Electrical Parameters

- Supply Voltage: 2.5V  $\pm 5\%$

### Operating Temperature Ranges

- -10 to 70°C
- -40 to 85°C
- -40 to 105°C
- -40 to 125°C

### Output Details

- Output Compatibility: LVPECL
- Drive Capability: 50Ω terminated to Vs-2.0V
- Output Voltage Levels:  
Output Low (VOL): 1.095V max  
Output High (VOH): 1.475V min

### Output Control

- Standby Operation:  
Logic '1' (70% Vs min) to pad 1 enables oscillator output.  
Logic '0' (30% Vs max) to pad 1 disables oscillator output.  
No connection to pad 1 enables oscillator output due to internal pull-up resistor.
- Standby Current: 10μA max
- Start-up Time: 10ms max


### Noise Parameters

- Phase Jitter (12kHz to 20MHz): 300fs rms max
- Phase Jitter (12kHz to 20MHz):  
@100MHz: 129fs rms typ  
@125MHz: 101fs rms typ  
@156.25MHz: 79fs rms typ

### Environmental Parameters


- Storage Temperature Range: -55 to 125°C
- Shock: 1500G, 0.5ms, 3 times for each surface, total 18 times.
- Vibration: Freq. range: 20~2000Hz, peak to peak amplitude: 1.52mm, peak acceleration: 20G (196m/s<sup>2</sup>), 3 direction(X, Y,Z), each cycle: 20min, 4 cycles for each direction.

### Outline (mm)

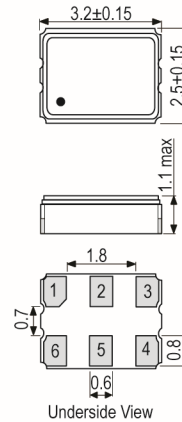

- Pad Connections
1. Standby Operation
  2. N/C
  3. GND
  4. Output +
  5. Output -
  6. +Vs

### Solder Pad Layout



ISSUE 3; December 2023

### Ordering Information

- \*Minimum info required
  - Frequency\*
  - Model\*
  - Output
  - Frequency Stability (over operating temperature range)\*
  - Operating Temperature Range\*
  - Supply Voltage
- Example
  - 156.25MHz IQXO-623
  - LVPECL ±50ppm -40 to 85C 2.5V

### Compliance

- RoHS Status (2015/863/EU)      Compliant
- REACH Status                      Compliant
- MSL Rating (JDEC-STD-033):    Not Applicable

### Packaging Details

- Tape & reel in accordance with EIA-481
  - Quantities below the standard reel size to be supplied on cut ta
  - Standard Reel Quantity: 3,000 Pieces

### Electrical Specification - maximum limiting values 2.5V ±5%

Frequency Min	Frequency Max	Temperature Range	Stability Min	Current Draw	Rise and Fall Time (20-80%)	Duty Cycle
		°C	ppm	mA	ns	%
13.5MHz	99.999999MHz	-10 to 70	±25.0	50	1	45/55%
		-40 to 85	±30.0	50	1	45/55%
		-40 to 125	±70.0	50	1	45/55%
		-40 to 105	±50.0	50	1	45/55%
100.0MHz	156.25MHz	-10 to 70	±25.0	50	0.5	45/55%
		-40 to 85	±30.0	50	0.5	45/55%
		-40 to 125	±70.0	50	0.5	45/55%
		-40 to 105	±50.0	50	0.5	45/55%

*This document was correct at the time of printing; please contact your local sales office for the latest version.*  
[Click to view latest version on our website.](#)

ISSUE 3; December 2023

### Description

- LVPECL output crystal oscillator using a high frequency fundamental crystal to give very low jitter. Hermetically sealed ceramic package with a seam sealed metal lid.
- Developed Frequencies: 25.0MHz, 27.0MHz, 100.0MHz, 125.0MHz and 156.250MHz
- Note: Operating temperature ranges -40 to 105°C and -40 to 125°C are intended for industrial use and not for safety critical applications such as automotive. Please contact IQD for alternative options.



### Frequency Parameters

- Frequency 13.50MHz to 156.250MHz
- Frequency Stability  $\pm 25.00\text{ppm}$  to  $\pm 100.00\text{ppm}$
- Ageing  $\pm 3\text{ppm}$  max per year @ 25°C

### Electrical Parameters

- Supply Voltage 3.3V  $\pm 5\%$

### Operating Temperature Ranges

- -10 to 70°C
- -40 to 85°C
- -40 to 105°C
- -40 to 125°C

### Output Details

- Output Compatibility LVPECL
- Drive Capability 50Ω terminated to Vs-2.0V
- Output Voltage Levels:  
Output Low (VOL): 1.680V max  
Output High (VOH): 2.275V min

### Output Control


- Standby Operation:  
Logic '1' (70% Vs min) to pad 1 enables oscillator output.  
Logic '0' (30% Vs max) to pad 1 disables oscillator output.  
No connection to pad 1 enables oscillator output due to internal pull-up resistor.
- Standby Current: 10μA max
- Start-up Time: 10ms max

### Noise Parameters


- Phase Jitter (12kHz to 20MHz): 300fs rms max
- Phase Jitter (12kHz to 20MHz):  
@100MHz: 155fs rms typ  
@125MHz: 132fs rms typ  
@156.25MHz: 106fs rms typ

### Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Shock: 1500G, 0.5ms, 3 times for each surface, total 18 times.
- Vibration: Freq. range: 20~2000Hz, peak to peak amplitude: 1.52mm, peak acceleration: 20G (196m/s<sup>2</sup>), 3 direction(X, Y,Z), each cycle: 20min, 4 cycles for each direction.

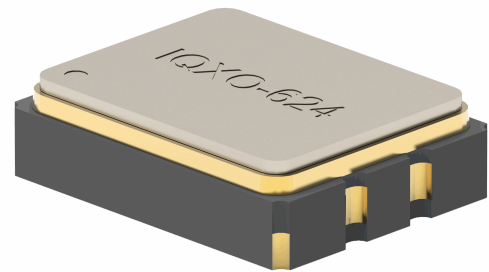


### Outline (mm)

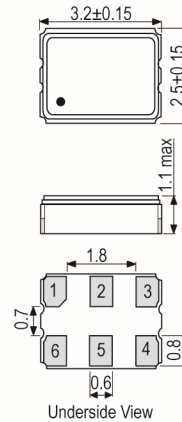

- #### Pad Connections
1. Standby Operation
  2. N/C
  3. GND
  4. Output +
  5. Output -
  6. +Vs

#### Solder Pad Layout



ISSUE 3; December 2023

### Ordering Information

- Frequency\*
  - Model\*
  - Output
  - Frequency Stability (over operating temperature range)\*
  - Operating Temperature Range\*
  - Supply Voltage
  - (\*minimum required)
- Example
  - 156.25MHz IQXO-624
  - LVPECL ±50ppm -40 to 85C 3.3V

### Compliance

- RoHS Status (2015/863/EU)      Compliant
- REACH Status                      Compliant
- MSL Rating (JDEC-STD-033):    Not Applicable

### Packaging Details

- Tape & reel in accordance with EIA-481
  - Quantities below the standard reel size to be supplied on cut tape.
  - Standard Reel Quantity: 3,000 Pieces

### Electrical Specification - maximum limiting values 3.3V ±5%

Frequency Min	Frequency Max	Temperature Range	Stability Min	Current Draw	Rise and Fall Time (20-80%)	Duty Cycle
		°C	ppm	mA	ns	%
13.5MHz	99.999999MHz	-10 to 70	±25.0	50	1	45/55%
		-40 to 85	±30.0	50	1	45/55%
		-40 to 125	±70.0	50	1	45/55%
		-40 to 105	±50.0	50	1	45/55%
100.0MHz	156.25MHz	-10 to 70	±25.0	50	0.5	45/55%
		-40 to 85	±30.0	50	0.5	45/55%
		-40 to 125	±70.0	50	0.5	45/55%
		-40 to 105	±50.0	50	0.5	45/55%

*This document was correct at the time of printing; please contact your local sales office for the latest version.*  
[Click to view latest version on our website.](#)

### Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1 760 668 8935

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)