

ISSUE 4; September 2021

## Description

- Low EMI Spread Spectrum surface mount crystal oscillator in a ceramic package hermetically sealed with a seam sealed metal lid
- $\pm 0.125\%$  Centre Spread
- $\pm 0.25\%$  Centre Spread
- $\pm 0.5\%$  Centre Spread
- $\pm 1\%$  Centre Spread
- $\pm 2\%$  Centre Spread
- 0.25% Down Spread
- 0.5% Down Spread
- 1% Down Spread
- 2% Down Spread
- 4% Down Spread

## Frequency Parameters

- Frequency: 1.0MHz to 166.0MHz
- Frequency Stability:  $\pm 25.00\text{ppm}$  to  $\pm 100.00\text{ppm}$
- Ageing:  $\pm 3\text{ppm}$  max per year

## Electrical Parameters

- Supply Voltage: 2.5V  $\pm 5\%$
- Internal Spread Spectrum Modulation Frequency: 30kHz to 40kHz

## Operating Temperature Ranges

- 10 to 70°C
- 40 to 85°C

## Output Details

- Output Compatibility: CMOS
- Drive Capability: 15pF max
- Modulation Ratios:
  - Centre Spread  $\pm 0.125\%$ ,  $\pm 0.25\%$ ,  $\pm 0.5\%$ ,  $\pm 1\%$ ,  $\pm 2\%$
  - Down Spread -0.25%, -0.5%, -1%, -2%, -4%

## Output Control

- Standby Operation:
  - Logic '1' to pad 1 enables oscillator output
  - Logic '0' to pad 1 disables oscillator output, the oscillator output goes to a high impedance state
  - No connection to pad 1 enables oscillator output
- Standby Current: 10 $\mu$ A max


## Noise Parameters

- Cycle to Cycle Jitter (1- $\sigma$ ): 100ps max


## Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Shock: 1500G, 0.5ms, 3 times in each of 3 mutually perpendicular planes
- Vibration: 20G, 20-2000Hz, 1.52mm amplitude, 4 cycles of 20mins in 3 mutually perpendicular planes (total 4hrs)

## Outline (mm) $\pm 0.125\%$ = Centre Spread

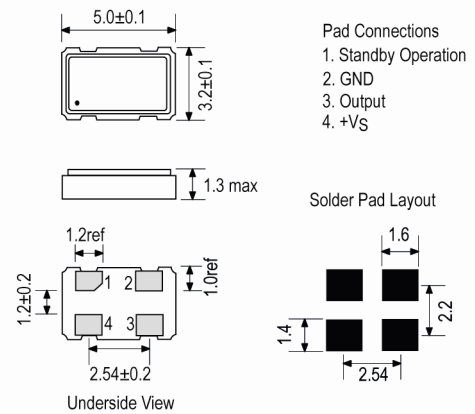


## Test Circuit

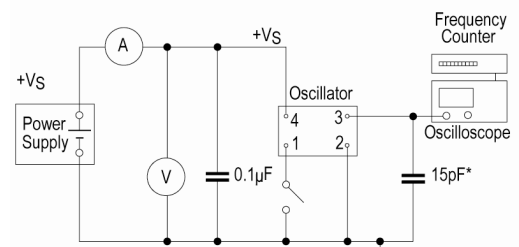

\* Inclusive of jigging and equipment capacitance

## Example Output Spectrum (Centre Spread $\pm 1\%$ )

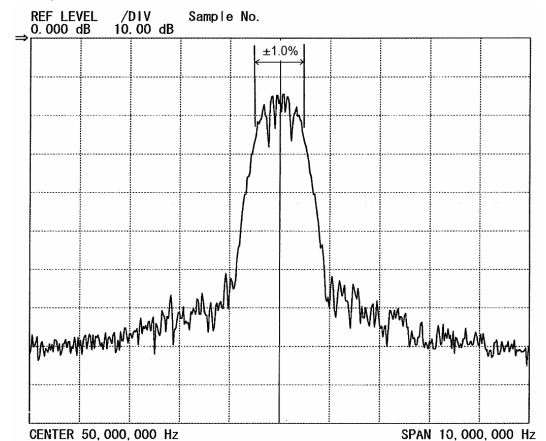

## Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1 760 318 2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

### Manufacturing Details

- RoHS Terminations                    Au over Ni over W base
- RoHS Reflow                            260°C for 10secs max

### Ordering Information

- Frequency\*
- Model\*
- Modulation Ratio\*
- Output
- Frequency Stability\*
- Operating Temperature Range\*
- Supply Voltage
- (\*minimum required)
- Example:  
   20.0MHz IQXS-11 ±1%  
   CMOS ±50ppm -10 to 70C 2.5V

### Compliance

- RoHS Status (2015/863/EU)        Compliant
- REACH Status                        Compliant
- MSL Rating (JDEC-STD-033):      Not Applicable

### Packaging Details

- Pack Style: Reel            Tape & reel in accordance with EIA-481-D  
   Pack Size: 1,000
- Pack Style: Cutt            Cut tape  
   Pack Size: 1

### Electrical Specification - maximum limiting values 2.5V ±5%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	49.999999MHz	-10 to 70 -40 to 85	±25.0 ±25.0	20 20	10 10	40/60% 40/60%
50.0MHz	99.999999MHz	-10 to 70 -40 to 85	±25.0 ±25.0	30 30	5 5	40/60% 40/60%
100.0MHz	149.999999MHz	-10 to 70 -40 to 85	±25.0 ±25.0	30 30	4 4	40/60% 40/60%
150.0MHz	166.0MHz	-10 to 70 -40 to 85	±25.0 ±25.0	35 35	3 3	40/60% 40/60%

*This document was correct at the time of printing; please contact your local sales office for the latest version.*  
[Click to view latest version on our website.](#)

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
 USA: +1 760 318 2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
 Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)