

ISSUE 1; October 2017

Description

- The IQXT-315 uses ASIC technology to provide enhanced frequency versus temperature stability. It also delivers to the industry the lowest jitter achievable from an ultra-stable TCXO. This allows the oscillator to be compliant with various standards including GR-1244, GR-253, G.812, G.813, G.8262 and G.827x.
- FEATURES:
 - RMS phase jitter down to 0.13ps.
 - Phase noise $< \square 160\text{dBc/Hz}$ floor.
 - Excellent frequency stability.
- APPLICATIONS:
 - Stratum 3 / IEEE 1588 / SyncE
 - SONET / SDH / WDM / OTN
 - Carrier Ethernet / Microwave Backhaul / Transport Equipment
- Standard Frequencies: 10.0MHz, 12.80MHz, 16.3840MHz, 19.440MHz, 20.0MHz, 20.480MHz, 24.5760MHz, 25.0MHz, 30.720MHz, 38.880MHz and 40.0MHz.

Frequency Parameters

- Frequency 10.0MHz to 40.0MHz
- Frequency Tolerance (@ constant temperature):
 - $\pm 10\text{ppb}$ after 10 days of continuous operation.
 - $\pm 40\text{ppb}$ after 48hrs of continuous operation.
- Frequency Stability (over operating temperature range):
 - $\pm 100\text{ppb}$ to $\pm 280\text{ppb}$
- Frequency Stability: Measurement referenced to $(F_{\text{max}} + F_{\text{min}}) / 2$.
- Frequency Slope $\Delta F / \Delta T$ (in still air): $\pm 20\text{ppb}/^\circ\text{C}$ to $\pm 100\text{ppb}/^\circ\text{C}$
- Root Allan Variance (@ 25°C, $\tau = 1\text{sec}$): 5×10^{-11}
- Acceleration Sensitivity (gamma vector of all 3 axes from 30 to 1500Hz): Typically 2ppb/G max
- Supply Voltage Variation ($\pm 5\%$ change @ 25°C): $\pm 25\text{ppb}$ typ
- Free-run Accuracy (inclusive of frequency tolerance @ 25°C, operating temperature range, supply voltage variation [$\pm 5\%$ change], load variation [$\pm 5\text{pF}$ change], reflow soldering and 20yrs ageing): $\pm 4.6\text{ppm}$ max
- Wander Generation – TDEV: Compliant with GR-1244 fig 5-4, G.812 types II & III fig 2, G.813 & G.8262.
- Wander Generation – MTIE: Compliant with GR-1244 fig 5-5, G.812 types II & III fig 1, G.813 & G.8262.

Electrical Parameters

- Supply Voltage 3.3V $\pm 5\%$


Operating Temperature Ranges

- 40 to 85°C

Output Details


- Output Compatibility HCMOS
- Drive Capability 30pF max
- Output Voltage Levels:
 - Output Low (VoL): 10%Vs max
 - Output High (VoH): 90%Vs min
- Start Up Time (amplitude within 90% of specified output level): 5ms to 15ms

Outline (mm)




Pad Connections


- Do not connect or Voltage Control
- GND
- Do not connect or Vref or Vtemp
- Output
- +Vs
- Enable/Disable




Solder Pad Layout



Example Phase Noise @ 20.0MHz

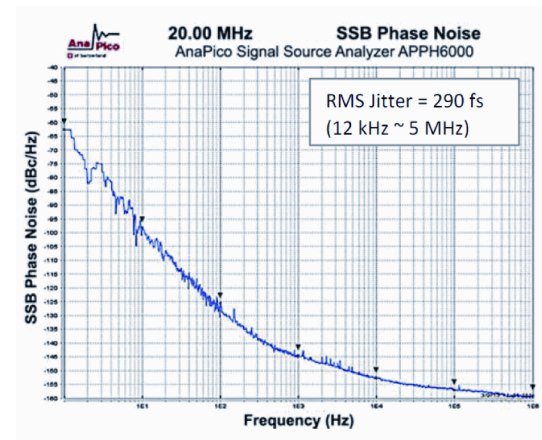

Example Phase Noise @ 32.0MHz

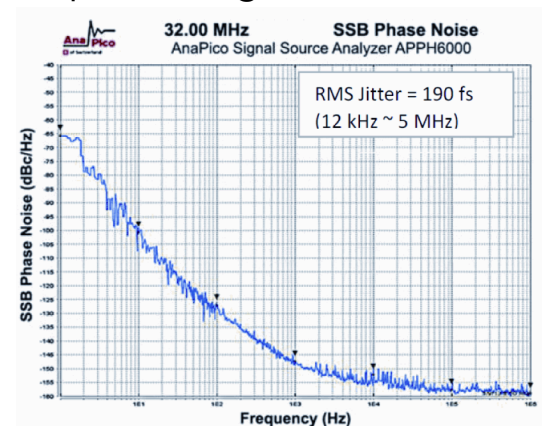

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Output Control

- Tri-State Mode:
Logic '0' (20%Vs max) to pad 6 disables the oscillator output, the output goes to a high impedance state.
Logic '1' (60%Vs min) or no connection to pad 6 enables the oscillator output.

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): 1

Packaging Details

- Pack Style: Bulk Bulk pack
Pack Size: 100
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000

Electrical Specification - maximum limiting values 3.3V ±5%

Frequency Min	Frequency Max	Temperature Range	Stability	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppb	mA	ns	%
10.0MHz	40.0MHz	-40 to 85	-	6	8	45/55%

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Chipset Approval Table

IQD Model	Ref No.	Frequency	Chipset Type	IC Supplier	
IQXT-315-1	E6241LF	12.80MHz	IDT8V97051, 82P337xx, 82P33731	IDT	
IQXT-315-2	E6265LF	25.0MHz	IDT8V97051	IDT	
IQXT-315-3	E6335LF	20.0MHz	82P337xx, 82P33731	IDT	
IQXT-315-4	E6413LF	12.80MHz	-	-	
IQXT-315-5	E6414LF	20.0MHz	-	-	
IQXT-315-6	E6415LF	24.5760MHz	-	-	
IQXT-315-7	E6416LF	25.0MHz	-	-	
IQXT-315-8	E6518LF	12.80MHz	Si5348	SiLabs	
IQXT-315-9	E6588LF	40.0MHz	Si5342, Si5344, Si5345	SiLabs	

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com