

ISSUE 1; February 2017

Description

- Voltage controlled crystal oscillator in a ceramic package with a hermetically sealed metal lid

Frequency Parameters

- Frequency 1.0MHz to 77.76MHz
- Frequency Stability $\pm 20.00\text{ppm}$ to $\pm 50.00\text{ppm}$
- Ageing (@ 25°C): $\pm 3\text{ppm}$ max

Electrical Parameters

- Supply Voltage 2.5V $\pm 5\%$

Frequency Adjustment

- Pulling $\pm 50\text{ppm}$ min
- Control Voltage 1.25V $\pm 1.05\text{V}$
- Input Impedance 2M Ω min
- Linearity: $\pm 10\%$ max

Operating Temperature Ranges

- 0 to 70°C
- -40 to 85°C

Output Details

- Output Compatibility HCMOS
- Drive Capability 15pF max
- Start Up Time: 10ms max

Output Control

- Standby Operation:
Logic '1' (>70% Vs) to pad 2 enables oscillator output
Logic '0' (<30% Vs) to pad 2 disables oscillator output: when disabled the oscillator output goes to the high impedance state
No connection pad 2 enables oscillator output

Output Levels

- VoH: >90% of Vs
- VoL: <10% of Vs


Noise Parameters

- Period Jitter (pk-pk): 100ps max
- Period Jitter (one sigma): 25ps max

Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Drop: 1.2m drop (3 times) onto a hard surface
- Vibration: 1.5mm amplitude, 10-55-10Hz, full sine wave, 2mins in 3 mutually perpendicular planes, duration 2hrs in each plane

Outline (mm)

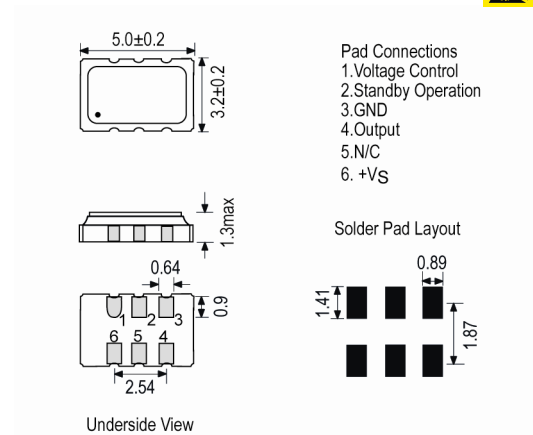

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Ordering Information

- Frequency*
 - Model*
 - Output
 - Frequency Stability (over operating temperature range)*
 - Operating Temperature Range*
 - Supply Voltage
 - Pullability
 - (*minimum required)
- Example
 - 10.0MHz IQXV-63
 - HCMOS ±50ppm -40 to 85C 2.5V ±50ppm min

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Bulk Loose in bulk pack
 - Pack Size: 1
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
 - Pack Size: 1,000

Electrical Specification - maximum limiting values 2.5V ±5%

| Frequency Min | Frequency Max | Temperature Range | Stability (Min) | Current Draw | Rise and Fall Time | Duty Cycle |
|---------------|---------------|-------------------|-----------------|--------------|--------------------|------------|
| | | °C | ppm | mA | ns | % |
| 1.0MHz | 20.0MHz | 0 to 70 | ±20.0 | 10 | 10 | 45/55% |
| | | -40 to 85 | ±50.0 | 10 | 10 | 45/55% |
| 20.000001MHz | 40.0MHz | 0 to 70 | ±20.0 | 15 | 8 | 45/55% |
| | | -40 to 85 | ±50.0 | 15 | 8 | 45/55% |
| 40.000001MHz | 77.76MHz | 0 to 70 | ±20.0 | 25 | 5 | 45/55% |
| | | -40 to 85 | ±50.0 | 25 | 5 | 45/55% |

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com