

ISSUE 1; May 2016

Description

- The IQXV-86 is an Ultra Low Noise VCXO in 5.0 x 3.2mm surface mount package.
- FEATURES:
Excellent close-in phase noise performance.
Ultra low jitter, 0.05 to 0.3ps integrated 12kHz to 20MHz.
CMOS, LVPECL or LVDS output options.
Wide frequency range.
- APPLICATIONS:
Communications
Base stations
DSL/ADSL
SONET/SDH
WiMAX/W-LAN
Ethernet
Wi-Fi

Frequency Parameters

- Frequency 1.0MHz to 800.0MHz
- Frequency Stability $\pm 10.00\text{ppm}$ to $\pm 20.00\text{ppm}$
- Frequency Stability: Includes Frequency Tolerance @ 25°C, operating temperature range, supply voltage variation, load variation and 15yrs ageing @ 25°C.

Electrical Parameters

- Supply Voltage 3.3V $\pm 5\%$
- Supply Current:
CMOS 1mA to 40mA
LVPECL 40mA to 120mA
LVDS 30mA to 80mA



Frequency Adjustment

- Pulling $\pm 50\text{ppm}$ min APR
- Voltage Control:
Absolute Pull Range (APR): $\pm 50\text{ppm}$ min
Total Pull Range (frequency shift from minimum to maximum control voltage): 100ppm to 250ppm
Control Voltage (nominal 1.65V): 0 to 3.3V
Linearity (Control Voltage 0.3 to 3V): 10% max
Slope: Positive
Modulation Bandwidth (Control Voltage 0.3 to 3V): 15kHz min
Input Impedance: 0.1 to 10M Ω min

Operating Temperature Ranges

- -40 to 85°C


Outline (mm) 1.3mm package height






Pad Connections

1. Voltage Control
2. Enable/Disable or NC
3. GND
4. Output (CMOS)
5. Output (LVPECL/LVDS) or E/D or NC
6. +Vs

Solder Pad Layout




Outline (mm) 1.2mm package height





Pad Connections

1. Voltage Control
2. Enable/Disable or N/C
3. GND
4. Output (CMOS)
5. Output (LVPECL/LVDS) or E/D or NC
6. +Vs

Solder Pad Layout




Outline (mm) = 1.2±0.15mm package height



Pad Connections

1. Voltage Control
2. Enable/Disable or N/C
3. GND
4. Output (CMOS)
5. Output (LVPECL/LVDS) or E/D or N/C
6. +Vs

Solder Pad Layout



Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

Output Details

- Output Compatibility CMOS/LVPECL/LVDS
- Output Characteristics (CMOS up to 200MHz):
Load: 15pF
Output Low (VoL): 10%Vs max
Output High (VoH): 90%Vs min
Duty Cycle @ 50% Vs: 45/55% max
R/F Time (@ 90%/10%): 3ns max
Phase Jitter (12kHz-20MHz): 0.05 to 0.3ps rms max
- Output Characteristics (LVPECL):
Load: 50Ω
Output Low (VoL): Vs-1.6V max
Output High (VoH): Vs-1.03V min
Duty Cycle (@ Vs-1.3V): 45/55% max
R/F Time (@ 80%/20%): 0.6ns max
Phase Jitter (12kHz-20MHz): 0.05 to 0.3ps rms max
- Output Characteristics (LVDS):
Load: 100Ω
Differential Output Voltage: 350mV
Duty Cycle (@ 1.25V): 45/55% max
R/F Time: 0.6ns max
Phase Jitter (12kHz-20MHz): 0.05 to 0.3ps rms max

Output Control

- Power Down Mode:
Logic '0' (30%Vs max) or GND to E/D pad disables oscillator output.
Logic '1' (70%Vs min) or no connection (internal pull-up resistor) to E/D pad enables oscillator output.

Noise Parameters

- Phase Noise @ 25°C (F=77.76MHz, typ):
-73dBc/Hz @ 10Hz
-100dBc/Hz @ 100Hz
-128dBc/Hz @ 1kHz
-137dBc/Hz @ 10kHz
-148dBc/Hz @ 100kHz
- Phase Noise @ 25°C (F=122.88MHz, typ):
-67dBc/Hz @ 10Hz
-98dBc/Hz @ 100Hz
-127dBc/Hz @ 1kHz
-147dBc/Hz @ 10kHz
-150dBc/Hz @ 100kHz

Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Mechanical Shock: MIL-STD-883, Method 2002.
- Vibration: MIL-STD-883, Method 2007.
- Thermal Shock: MIL-STD-883, Method 1011.
- Humidity: After 48hrs @ 85°C ±2°C, 85% RH non-condensing.

Manufacturing Details

- Maximum Process Temperature: 260°C (40secs max)
- RoHS Reflow 260°C max for 40secs max

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.comWeb: www.iqdfrequencyproducts.com

Ordering Information

- Frequency*
- Model*
- Output Type*
- Pad 2 Function*
- Supply Voltage
- Frequency Stability*
- Operating Temperature Range
- (*minimum required)


Compliance

- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Bulk Loose in bulk pack
Pack Size: 1
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 4,000

Pb-Free Reflow

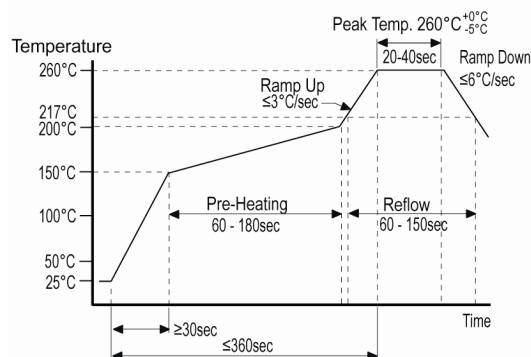

Electrical Specification - maximum limiting values 3.3V ±5%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	800.0MHz	-40 to 85	-	-	-	-

This document was correct at the time of printing; please contact your local sales office for the latest version.
[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
 USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com