



LHGAT

LHGAT


An increasing number of high temperature applications require the use of leaded (through-hole) ceramic packaged oscillators. For these applications, IQD offers the LHGAT 7 x 5mm crystal oscillator. The oscillator is designed to operate over a temperatures range of -55 to 125°C with high shock survivability.

Model Name	Description
LHGAT 1.8V	A 1.8V Version
LHGAT 2.5V	A 2.5V Version
LHGAT 3.0V	A 3.0V Version
LHGAT 3.3V	A 3.3V Version
LHGAT 5.0V	A 5.0V Version


ISSUE 2; June 2019

Description

- This product is designed and manufactured by Statek Corporation in California, USA and distributed by IQD. An increasing number of high temperature applications require the use of leaded (through-hole) ceramic packaged oscillators. For these applications, IQD offers the LHGAT 7 x 5mm crystal oscillator. The oscillator is designed to operate over a temperatures range of -55 to 125°C with high shock survivability.
- A 5000G, Gold Plated (RoHS)
- A-05 5000G, Solder Dipped (RoHS)
- B 10000G, Gold Plated (RoHS)
- B-05 10000G, Solder Dipped (RoHS)
- C 20000G, Gold Plated (RoHS)
- C-05 20000G, Solder Dipped (RoHS)
- D 30000G, Gold Plated (RoHS)
- D-05 30000G, Solder Dipped (RoHS)
- FEATURES:
 - Excellent stability over temperature
 - High shock resistance
 - CMOS output - output enable/disable
 - Hermetically sealed ceramic package - 7 x 5mm
 - Double hermetically sealed package option
 - Through-hole leaded package
 - Reduces mechanical and thermal mounting stresses
 - Robust lead-attach eutectic brazing process
 - Gold plated Kovar leads
- APPLICATIONS:
 - Aerospace -
 - Navigation / Communications
 - Avionics applications
 - Flight recorder
 - Engine control
- Please note that all data is only valid at 25°C unless otherwise stated.

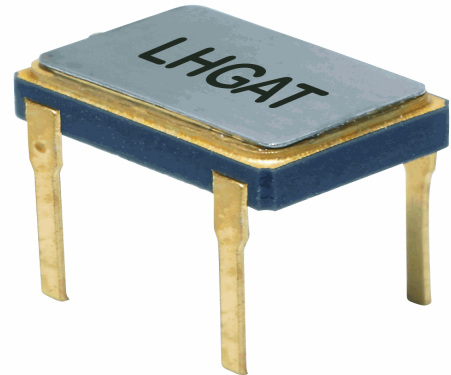

Outline (mm) A = 5000G, Gold Plated (RoHS)

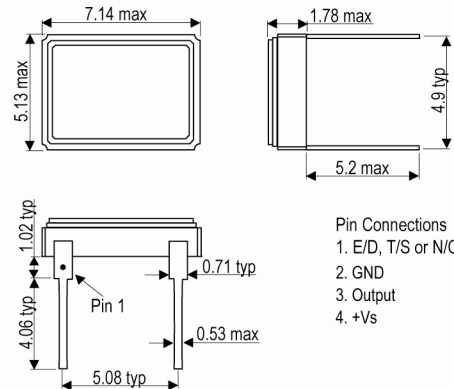

Frequency Parameters

- Frequency: 320.0kHz to 50.0MHz
- Frequency Tolerance: $\pm 20.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Tolerance Condition: @ 25°C
- Frequency Stability: $\pm 15.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing: $\pm 5\text{ppm}$ max 1st year @ 25°C
- Frequency Stability does not include Frequency Tolerance @ 25°C
- Note: Tighter Frequency Tolerances and higher Operating Temperatures (up to 200°C) are available - please contact an IQD Sales Office

Electrical Parameters

- Supply Voltage: 1.8V $\pm 10\%$
- Current Draw (typical for the 3.3V version):
 - 24MHz - 3.0mA
 - 32MHz - 5.0mA
 - 40MHz - 5.5mA
 - 50MHz - 6.0mA
- Absolute Maximum Supply Voltage: -0.5V to 4.0V
- Note: Tighter Duty Cycles are available - please contact an IQD Sales Office

Operating Temperature Ranges

- -10 to 70°C
- -40 to 85°C
- -55 to 125°C



ISSUE 2; June 2019

Output Details

- Output Compatibility CMOS
- Drive Capability 15pF

Output Control

- Start-Up Time: 5ms max

Environmental Parameters

- Shock: Level (A to D), 0.5ms, 1/2 sine
- Vibration: 20G, 10-2000Hz swept sine
- Storage Temperature Range: -55 to 125°C

Manufacturing Details

- Maximum Process Temperature: 260°C for 20sec max

Ordering Information

- Frequency*
Model*
Supply Voltage
Shock Level*
Terminations Variant*
Output
Frequency Tolerance (@ 25°C)*
Frequency Stability (over operating temperature range)*
Operating Temperature Range*
Pin 1 Function*
(*minimum required)
- Shock Level Options:
A = 5000G (standard)
B = 10000G
C = 20000G
D = 30000G
Note: Shock levels above 30000G are available - please contact an IQD Sales Office
- Termination Variants:
'Blank' = Gold Plated
05 = Solder Dipped
Note: non-RoHS compliant terminations are available - please contact an IQD Sales Office
- Pin 1 Function Options:
EN = Enable/Disable
TS = Tri-State
NC = No connection
- Example
10.0MHz LHGAT 1.8V A-05
CMOS ±50ppm ±100ppm -40 to 85C EN

Compliance

- RoHS Status (2015/863/EU) Optional
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Tube Supplied in tubes
Pack Size: 1



Crystal Clock Oscillator Specification LHGAT 1.8V

ISSUE 2; June 2019

Electrical Specification - maximum limiting values 1.8V \pm 10%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
320.0kHz	50.0MHz	-10 to 70	\pm 15.0	-	8	40/60%
		-40 to 85	\pm 30.0	-	8	40/60%
		-55 to 125	\pm 40.0	-	8	40/60%


This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)


ISSUE 2; June 2019

Description

- This product is designed and manufactured by Statek Corporation in California, USA and distributed by IQD. An increasing number of high temperature applications require the use of leaded (through-hole) ceramic packaged oscillators. For these applications, IQD offers the LHGAT 7 x 5mm crystal oscillator. The oscillator is designed to operate over a temperature range of -55 to 125°C with high shock survivability.
- A 5000G, Gold Plated (RoHS)
- A-05 5000G, Solder Dipped (RoHS)
- B 10000G, Gold Plated (RoHS)
- B-05 10000G, Solder Dipped (RoHS)
- C 20000G, Gold Plated (RoHS)
- C-05 20000G, Solder Dipped (RoHS)
- D 30000G, Gold Plated (RoHS)
- D-05 30000G, Solder Dipped (RoHS)
- FEATURES:
 - Excellent stability over temperature
 - High shock resistance
 - CMOS output - output enable/disable
 - Hermetically sealed ceramic package - 7 x 5mm
 - Double hermetically sealed package option
 - Through-hole leaded package
 - Reduces mechanical and thermal mounting stresses
 - Robust lead-attach eutectic brazing process
 - Gold plated Kovar leads
- APPLICATIONS:
 - Aerospace -
 - Navigation / Communications
 - Avionics applications
 - Flight recorder
 - Engine control
- Please note that all data is only valid at 25°C unless otherwise stated.

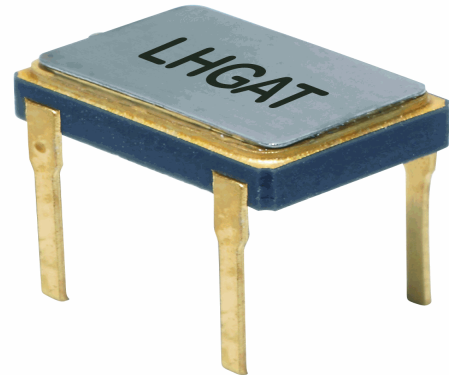

Outline (mm) A = 5000G, Gold Plated (RoHS)

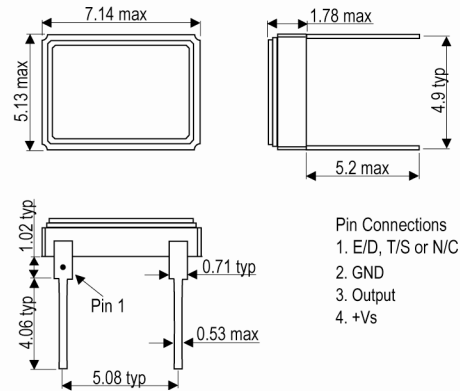

Frequency Parameters

- Frequency: 320.0kHz to 50.0MHz
- Frequency Tolerance: $\pm 20.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Tolerance Condition: @ 25°C
- Frequency Stability: $\pm 15.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing: $\pm 5\text{ppm}$ max 1st year @ 25°C
- Frequency Stability does not include Frequency Tolerance @ 25°C
- Note: Tighter Frequency Tolerances and higher Operating Temperatures (up to 200°C) are available - please contact an IQD Sales Office

Electrical Parameters

- Supply Voltage: 2.5V $\pm 10\%$
- Current Draw (typical for the 3.3V version):
 - 24MHz - 3.0mA
 - 32MHz - 5.0mA
 - 40MHz - 5.5mA
 - 50MHz - 6.0mA
- Absolute Maximum Supply Voltage: -0.5V to 4.0V
- Note: Tighter Duty Cycles are available - please contact an IQD Sales Office

Operating Temperature Ranges

- -10 to 70°C
- -40 to 85°C
- -55 to 125°C



ISSUE 2; June 2019

Output Details

- Output Compatibility CMOS
- Drive Capability 15pF

Output Control

- Start-Up Time: 5ms max

Environmental Parameters

- Shock: Level (A to D), 0.5ms, 1/2 sine
- Vibration: 20G, 10-2000Hz swept sine
- Storage Temperature Range: -55 to 125°C

Manufacturing Details

- Maximum Process Temperature: 260°C for 20sec max

Ordering Information

- Frequency*
Model*
Supply Voltage
Shock Level*
Terminations Variant*
Output
Frequency Tolerance (@ 25°C)*
Frequency Stability (over operating temperature range)*
Operating Temperature Range*
Pin 1 Function*
(*minimum required)
- Shock Level Options:
A = 5000G (standard)
B = 10000G
C = 20000G
D = 30000G
Note: Shock levels above 30000G are available - please contact an IQD Sales Office
- Termination Variants:
'Blank' = Gold Plated
05 = Solder Dipped
Note: non-RoHS compliant terminations are available - please contact an IQD Sales Office
- Pin 1 Function Options:
EN = Enable/Disable
TS = Tri-State
NC = No connection
- Example
10.0MHz LHGAT 2.5V A-05
CMOS ±50ppm ±100ppm -40 to 85C EN

Compliance

- RoHS Status (2015/863/EU) Optional
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Tube Supplied in tubes
Pack Size: 1



Crystal Clock Oscillator Specification LHGAT 2.5V

ISSUE 2; June 2019

Electrical Specification - maximum limiting values 2.5V \pm 10%


Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
320.0kHz	50.0MHz	-10 to 70	\pm 15.0	-	8	40/60%
		-40 to 85	\pm 30.0	-	8	40/60%
		-55 to 125	\pm 40.0	-	8	40/60%

This document was correct at the time of printing; please contact your local sales office for the latest version.
[Click to view latest version on our website.](#)


ISSUE 2; June 2019

Description

- This product is designed and manufactured by Statek Corporation in California, USA and distributed by IQD. An increasing number of high temperature applications require the use of leaded (through-hole) ceramic packaged oscillators. For these applications, IQD offers the LHGAT 7 x 5mm crystal oscillator. The oscillator is designed to operate over a temperature range of -55 to 125°C with high shock survivability.
- A 5000G, Gold Plated (RoHS)
- A-05 5000G, Solder Dipped (RoHS)
- B 10000G, Gold Plated (RoHS)
- B-05 10000G, Solder Dipped (RoHS)
- C 20000G, Gold Plated (RoHS)
- C-05 20000G, Solder Dipped (RoHS)
- D 30000G, Gold Plated (RoHS)
- D-05 30000G, Solder Dipped (RoHS)
- FEATURES:
 - Excellent stability over temperature
 - High shock resistance
 - CMOS output - output enable/disable
 - Hermetically sealed ceramic package - 7 x 5mm
 - Double hermetically sealed package option
 - Through-hole leaded package
 - Reduces mechanical and thermal mounting stresses
 - Robust lead-attach eutectic brazing process
 - Gold plated Kovar leads
- APPLICATIONS:
 - Aerospace -
 - Navigation / Communications
 - Avionics applications
 - Flight recorder
 - Engine control
- Please note that all data is only valid at 25°C unless otherwise stated.

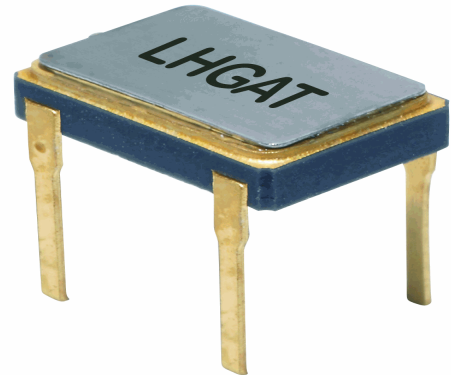

Outline (mm) A = 5000G, Gold Plated (RoHS)

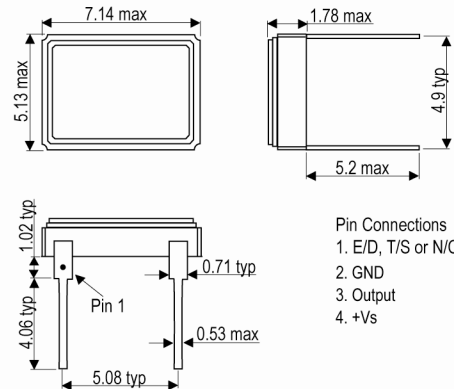

Frequency Parameters

- Frequency: 320.0kHz to 50.0MHz
- Frequency Tolerance: $\pm 20.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Tolerance Condition: @ 25°C
- Frequency Stability: $\pm 15.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing: $\pm 5\text{ppm}$ max 1st year @ 25°C
- Frequency Stability does not include Frequency Tolerance @ 25°C
- Note: Tighter Frequency Tolerances and higher Operating Temperatures (up to 200°C) are available - please contact an IQD Sales Office

Electrical Parameters

- Supply Voltage: 3.0V $\pm 10\%$
- Current Draw (typical for the 3.3V version):
 - 24MHz - 3.0mA
 - 32MHz - 5.0mA
 - 40MHz - 5.5mA
 - 50MHz - 6.0mA
- Absolute Maximum Supply Voltage: -0.5V to 4.0V
- Note: Tighter Duty Cycles are available - please contact an IQD Sales Office

Operating Temperature Ranges

- -10 to 70°C
- -40 to 85°C
- -55 to 125°C



ISSUE 2; June 2019

Output Details

- Output Compatibility CMOS
- Drive Capability 15pF

Output Control

- Start-Up Time: 5ms max

Environmental Parameters

- Shock: Level (A to D), 0.5ms, 1/2 sine
- Vibration: 20G, 10-2000Hz swept sine
- Storage Temperature Range: -55 to 125°C

Manufacturing Details

- Maximum Process Temperature: 260°C for 20sec max

Ordering Information

- Frequency*
Model*
Supply Voltage
Shock Level*
Terminations Variant*
Output
Frequency Tolerance (@ 25°C)*
Frequency Stability (over operating temperature range)*
Operating Temperature Range*
Pin 1 Function*
(*minimum required)
- Shock Level Options:
A = 5000G (standard)
B = 10000G
C = 20000G
D = 30000G
Note: Shock levels above 30000G are available - please contact an IQD Sales Office
- Termination Variants:
'Blank' = Gold Plated
05 = Solder Dipped
Note: non-RoHS compliant terminations are available - please contact an IQD Sales Office
- Pin 1 Function Options:
EN = Enable/Disable
TS = Tri-State
NC = No connection
- Example
10.0MHz LHGAT 3.0V A-05
CMOS ±50ppm ±100ppm -40 to 85C EN

Compliance

- RoHS Status (2015/863/EU) Optional
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Tube Supplied in tubes
Pack Size: 1



Crystal Clock Oscillator Specification LHGAT 3.0V

ISSUE 2; June 2019

Electrical Specification - maximum limiting values 3.0V \pm 10%


Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
320.0kHz	50.0MHz	-10 to 70	\pm 15.0	-	8	40/60%
		-40 to 85	\pm 30.0	-	8	40/60%
		-55 to 125	\pm 40.0	-	8	40/60%

This document was correct at the time of printing; please contact your local sales office for the latest version.
[Click to view latest version on our website.](#)


ISSUE 2; June 2019

Description

- This product is designed and manufactured by Statek Corporation in California, USA and distributed by IQD. An increasing number of high temperature applications require the use of leaded (through-hole) ceramic packaged oscillators. For these applications, IQD offers the LHGAT 7 x 5mm crystal oscillator. The oscillator is designed to operate over a temperature range of -55 to 125°C with high shock survivability.
- A 5000G, Gold Plated (RoHS)
- A-05 5000G, Solder Dipped (RoHS)
- B 10000G, Gold Plated (RoHS)
- B-05 10000G, Solder Dipped (RoHS)
- C 20000G, Gold Plated (RoHS)
- C-05 20000G, Solder Dipped (RoHS)
- D 30000G, Gold Plated (RoHS)
- D-05 30000G, Solder Dipped (RoHS)
- FEATURES:
 - Excellent stability over temperature
 - High shock resistance
 - CMOS output - output enable/disable
 - Hermetically sealed ceramic package - 7 x 5mm
 - Double hermetically sealed package option
 - Through-hole leaded package
 - Reduces mechanical and thermal mounting stresses
 - Robust lead-attach eutectic brazing process
 - Gold plated Kovar leads
- APPLICATIONS:
 - Aerospace -
 - Navigation / Communications
 - Avionics applications
 - Flight recorder
 - Engine control
- Please note that all data is only valid at 25°C unless otherwise stated.

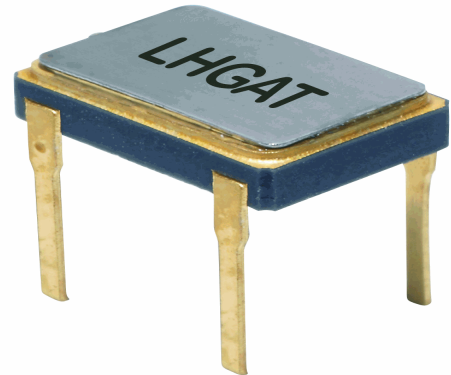

Outline (mm) A = 5000G, Gold Plated (RoHS)

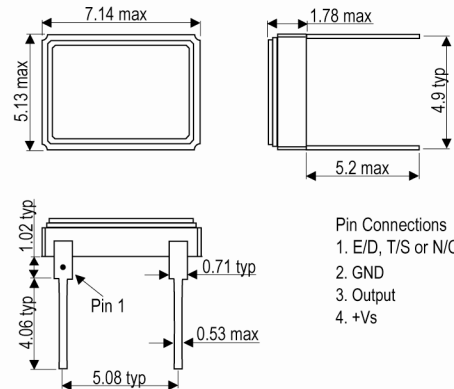

Frequency Parameters

- Frequency 320.0kHz to 50.0MHz
- Frequency Tolerance $\pm 20.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Tolerance Condition @ 25°C
- Frequency Stability $\pm 15.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing $\pm 5\text{ppm}$ max 1st year @ 25°C
- Frequency Stability does not include Frequency Tolerance @ 25°C
- Note: Tighter Frequency Tolerances and higher Operating Temperatures (up to 200°C) are available - please contact an IQD Sales Office

Electrical Parameters

- Supply Voltage 3.3V $\pm 10\%$
- Current Draw (typical):
 - 24MHz - 3.0mA
 - 32MHz - 5.0mA
 - 40MHz - 5.5mA
 - 50MHz - 6.0mA
- Absolute Maximum Supply Voltage: -0.5V to 4.0V
- Note: Tighter Duty Cycles are available - please contact an IQD Sales Office

Operating Temperature Ranges

- -10 to 70°C
- -40 to 85°C
- -55 to 125°C



ISSUE 2; June 2019

Output Details

- Output Compatibility CMOS
- Drive Capability 15pF

Output Control

- Start-Up Time: 5ms max

Environmental Parameters

- Shock: Level (A to D), 0.5ms, 1/2 sine
- Vibration: 20G, 10-2000Hz swept sine
- Storage Temperature Range: -55 to 125°C

Manufacturing Details

- Maximum Process Temperature: 260°C for 20sec max

Ordering Information

- Frequency*
Model*
Supply Voltage
Shock Level*
Terminations Variant*
Output
Frequency Tolerance (@ 25°C)*
Frequency Stability (over operating temperature range)*
Operating Temperature Range*
Pin 1 Function*
(*minimum required)
- Shock Level Options:
A = 5000G (standard)
B = 10000G
C = 20000G
D = 30000G
Note: Shock levels above 30000G are available - please contact an IQD Sales Office
- Termination Variants:
'Blank' = Gold Plated
05 = Solder Dipped (RoHS)
Note: non-RoHS compliant terminations are available - please contact an IQD Sales Office
- Pin 1 Function Options:
EN = Enable/Disable
TS = Tri-State
NC = No connection
- Example
10.0MHz LHGAT 3.3V A-05
CMOS ±50ppm ±100ppm -40 to 85C EN

Compliance

- RoHS Status (2015/863/EU) Optional
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Tube Supplied in tubes
Pack Size: 1



Crystal Clock Oscillator Specification LHGAT 3.3V

ISSUE 2; June 2019

Electrical Specification - maximum limiting values 3.3V \pm 10%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
320.0kHz	50.0MHz	-10 to 70	\pm 15.0	-	8	40/60%
		-40 to 85	\pm 30.0	-	8	40/60%
		-55 to 125	\pm 40.0	-	8	40/60%


This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)


ISSUE 2; June 2019

Description

- This product is designed and manufactured by Statek Corporation in California, USA and distributed by IQD. An increasing number of high temperature applications require the use of leaded (through-hole) ceramic packaged oscillators. For these applications, IQD offers the LHGAT 7 x 5mm crystal oscillator. The oscillator is designed to operate over a temperature range of -55 to 125°C with high shock survivability.
- A 5000G, Gold Plated (RoHS)
- A-05 5000G, Solder Dipped (RoHS)
- B 10000G, Gold Plated (RoHS)
- B-05 10000G, Solder Dipped (RoHS)
- C 20000G, Gold Plated (RoHS)
- C-05 20000G, Solder Dipped (RoHS)
- D 30000G, Gold Plated (RoHS)
- D-05 30000G, Solder Dipped (RoHS)
- FEATURES:
 - Excellent stability over temperature
 - High shock resistance
 - CMOS output - output enable/disable
 - Hermetically sealed ceramic package - 7 x 5mm
 - Double hermetically sealed package option
 - Through-hole leaded package
 - Reduces mechanical and thermal mounting stresses
 - Robust lead-attach eutectic brazing process
 - Gold plated Kovar leads
- APPLICATIONS:
 - Aerospace -
 - Navigation / Communications
 - Avionics applications
 - Flight recorder
 - Engine control
- Please note that all data is only valid at 25°C unless otherwise stated.

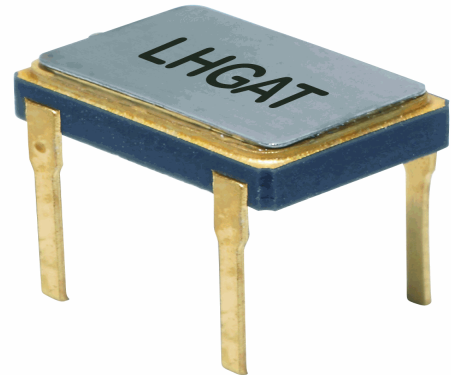

Outline (mm) A = 5000G, Gold Plated (RoHS)

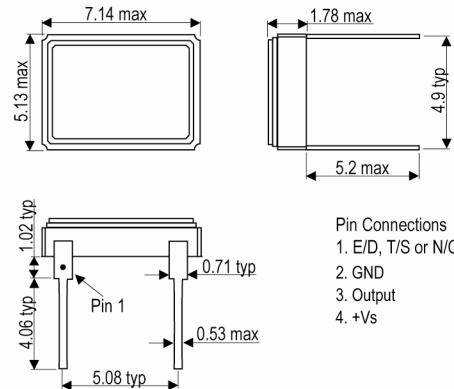

Frequency Parameters

- Frequency: 320.0kHz to 50.0MHz
- Frequency Tolerance: $\pm 20.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Tolerance Condition: @ 25°C
- Frequency Stability: $\pm 15.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing: $\pm 5\text{ppm}$ max 1st year @ 25°C
- Frequency Stability does not include Frequency Tolerance @ 25°C
- Note: Tighter Frequency Tolerances and higher Operating Temperatures (up to 200°C) are available - please contact an IQD Sales Office

Electrical Parameters

- Supply Voltage: 5.0V $\pm 10\%$
- Current Draw (typical):
 - 24MHz - 8mA
 - 32MHz - 10mA
 - 40MHz - 12mA
 - 50MHz - 13mA
- Absolute Maximum Supply Voltage: -0.5V to 7.0V
- Note: Tighter Duty Cycles are available - please contact an IQD Sales Office

Operating Temperature Ranges

- -10 to 70°C
- -40 to 85°C
- -55 to 125°C



ISSUE 2; June 2019

Output Details

- Output Compatibility CMOS
- Drive Capability 15pF

Output Control

- Start-Up Time: 5ms max

Environmental Parameters

- Shock: Level (A to D), 0.5ms, 1/2 sine
- Vibration: 20G, 10-2000Hz swept sine
- Storage Temperature Range: -55 to 125°C

Manufacturing Details

- Maximum Process Temperature: 260°C for 20sec max

Ordering Information

- Frequency*
Model*
Supply Voltage
Shock Level*
Terminations Variant*
Output
Frequency Tolerance (@ 25°C)*
Frequency Stability (over operating temperature range)*
Operating Temperature Range*
Pin 1 Function*
(*minimum required)
- Shock Level Options:
A = 5000G (standard)
B = 10000G
C = 20000G
D = 30000G
Note: Shock levels above 30000G are available - please contact an IQD Sales Office
- Termination Variants:
'Blank' = Gold Plated
05 = Solder Dipped (RoHS)
Note: non-RoHS compliant terminations are available - please contact an IQD Sales Office
- Pin 1 Function Options:
EN = Enable/Disable
TS = Tri-State
NC = No connection
- Example
10.0MHz LHGAT 5.0V A-05
CMOS ±50ppm ±100ppm -40 to 85C EN

Compliance

- RoHS Status (2015/863/EU) Optional
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Tube Supplied in tubes
Pack Size: 1

ISSUE 2; June 2019

Electrical Specification - maximum limiting values 5.0V \pm 10%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
320.0kHz	50.0MHz	-10 to 70	\pm 15.0	-	8	40/60%
		-40 to 85	\pm 30.0	-	8	40/60%
		-55 to 125	\pm 40.0	-	8	40/60%

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200

USA: +1 760 668 8935

Email: info@iqdfrequencyproducts.comWeb: www.iqdfrequencyproducts.com